



光源	LED
形式	キャノピー灯
パネル	強化ガラス(透明)
色温度	3,000K
保守率	良:0.81 中:0.79 否: 0.74
最大取付間隔	a-a 1.3H b-b 1.3H
備考	

С.	, a	
b	· - \ ·	b'
	<u> </u>	j.
	a'	G

器具光束	19,000 lm
上方光束	0 lm
下方光束	19,000 lm
最大光度	6,790 cd

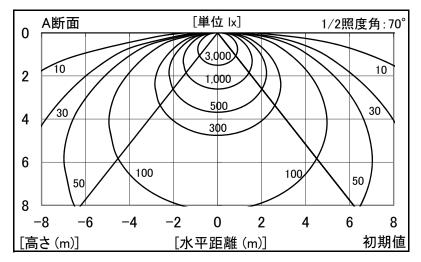

角度	光度	₹[cd/1,000				
円及	A-A'	B-B'	C-C'			
0	357	357	_			
10	353	353	-			
20	340	340	_			
30	315	314	-			
40	276	275	-			
50	219	222	_			
60	145	150	_			
70	71	79	_			
80	25	32	_			
90	1	1	-			
100	0	0	-			
110	0	0	_			
120	0	0	_			
130	0	0	_			
140	0	0	_			
150	0	0	_			
160	0	0	-			
170	0	0	_			
180	0	0	_			

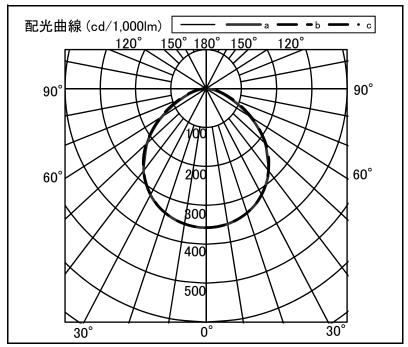

	反 天																				
反	天井	5井 80 井							70						50				30		0
射	射壁		70		50		30		70		50		30		50		30		30		0
率	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0
室	指数	照明率(×0.01)																			
0.	.6	64	59	49	47	40	39	62	57	48	46	40	39	47	45	39	38	39	38	33	32
0	.8	76	69	62	58	53	51	74	68	61	57	52	50	59	56	51	50	50	49	44	42
1.	.0	85	76	71	66	62	58	82	74	69	65	61	58	67	63	59	57	58	56	52	50
1.	25	92	82	79	73	70	66	89	80	78	72	69	66	75	70	67	65	66	64	59	57
1.	.5	98	86	86	78	77	71	94	84	84	77	76	71	80	75	73	70	71	69	65	63
2	.0	105	91	95	85	87	79	102	90	92	84	85	78	88	82	82	77	79	76	72	70
2	.5	110	95	101	89	94	84	106	93	98	88	91	83	93	86	88	82	84	81	77	75
3	.0	113	97	105	92	99	88	109	96	102	91	96	87	97	89	92	85	88	84	81	79
4	.0	118	100	111	96	105	93	113	99	108	95	103	92	101	93	97	90	93	88	86	84
5	.0	120	102	115	99	110	96	116	100	111	97	107	95	104	95	101	93	96	91	89	87
7.	.0	123	104	119	101	115	99	119	102	115	100	112	98	108	98	105	96	100	94	92	90
1	0	126	105	123	104	120	102	121	104	119	102	116	101	111	100	109	99	103	97	95	93